

EAPC[®]
AUTO ACCESSORIES

SHENGTUO[®]

ZHEJIANG LISHUI EXPANDING

EAPC[®]
AUTO ACCESSORIES

SHENGTUO[®]

ZHEJIANG LISHUI
EXPANDING

AUTOMOBILE PARTS CO.,LTD

ZHEJIANG LISHUI EXPANDING

AUTOMOBILE PARTS CO.,LTD

浙江丽水拓展汽车部件有限公司

ZHEJIANG LISHUI EXPANDING AUTOMOBILE PARTS CO.,LTD

工厂 (FACTORY):

浙江省丽水市莲都区万洋低碳智造小镇六号地块三号楼

BUILDING 3, BLOCK 6, WANYANG LOW CARBON SMART TOWN, LIANDU DISTRICT, LISHUI CITY, ZHEJIANG PROVINCE

办公室 (OFFICE):

浙江省温州市瑞安市塘下镇浦新东路

PUXIN EAST ROAD, TANGXIA TOWN, RUIAN CITY, WENZHOU CITY, ZHEJIANG PROVINCE

TEL:0086-0577-65291586 0086-0578-2267808

E-MAIL:13758768970@163.com cntuozhan@163.com

Electromagnetic Horns Air Horns
Backup Alarm Siren Horns Horn Spare Parts



ООО ЧЖЭЦЗЯНСКАЯ КОМПАНИЯ АВТОЗАПЧАСТЕЙ <ТОЧЖАНЬ>Г,ЛИШУЙ

ZHEJIANG LISHUI EXPANDING

AUTOMOBILE PARTS CO.,LTD

SPECIALIZED IN
HORN
www.cn-horn.com

About us

浙江丽水拓展汽车部件有限公司2008年开始运营，因为老板有一个进入国际汽配市场的梦想。一开始是一个小项目，公司做出了一款蜗牛喇叭，虽然这是一个小小的产品，但是它的工作量非常大。随后公司开始研发各种款式的喇叭，到现在已经拥有了上百种款式的喇叭。

起初工厂位于温州市瑞安市，随着规模的扩大现已搬迁到丽水市莲都区。占地面积6000平方米，每月生产数万套喇叭。多种产品和国内外知名汽车厂配套，并出口到东南亚，中东，俄罗斯，欧美等地区。


几年来在全体员工的努力下，我们不断地提高企业的经营水平和产品质量，为走向世界的中国汽车工业增添光彩！我们竭诚欢迎国内外客户光临指导，携手新世纪的东方

Zhejiang Lishui Expanding Automobile Parts Co., Ltd. started operations in 2008 because the boss has a dream of entering the international auto parts market.

Initially a small project, the company made a snail horn, although it is a small product, but its workload is very large. Then the company began to develop various styles of horns, and now has hundreds of styles of horns.

The factory was initially located in Tangxia Town, Ruian City, Wenzhou City. It has moved to Liandu District of Lishui City with the expansion of its scale. It covers an area of 6,000 square meters and produces tens of thousands of horns per month. Since our product placing on the market, is praised by user, in which a variety of products and the well-known domestic and foreign car plant and supporting exports in Southeast Asia, the Middle East, Russia, Europe and the United States and other regions.

In recent years, the company in the joint efforts of all staff, to hard work, innovation, pragmatism and dedication of the entrepreneurial spirit, continually improve the level of our enterprise management and product quality. We whole heartedly welcome domestic and foreign merchants to negotiate. Let us join hands and create a new era.

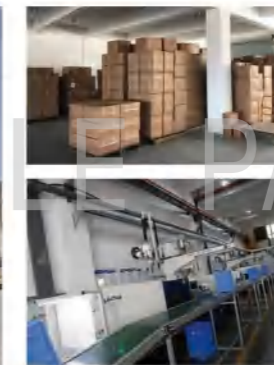


产品测试资源

- 公司内部测试室 ● 客户认可测试机构
- 第三方测试机构 ● 国家认可测试机构

Product Testing Resources

- Company test room
- Customer accredited testing body
- Third-party testing organization
- National Accreditation testing body

Товары проверяются 1 к 1 перед отправкой. Также поддерживает испытательное агентство, выбранное заказчиком.

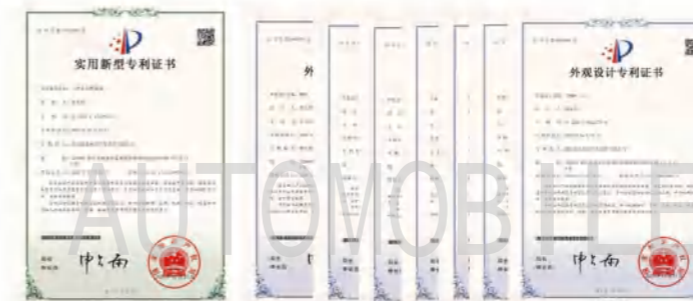


- 上百种专利
- Hundreds of related patents
- Более сотни связанных патентов

浙江省科技型企业

Zhejiang Science and Technology Enterprise

Чжэцзян Наука и Технологическое предприятие

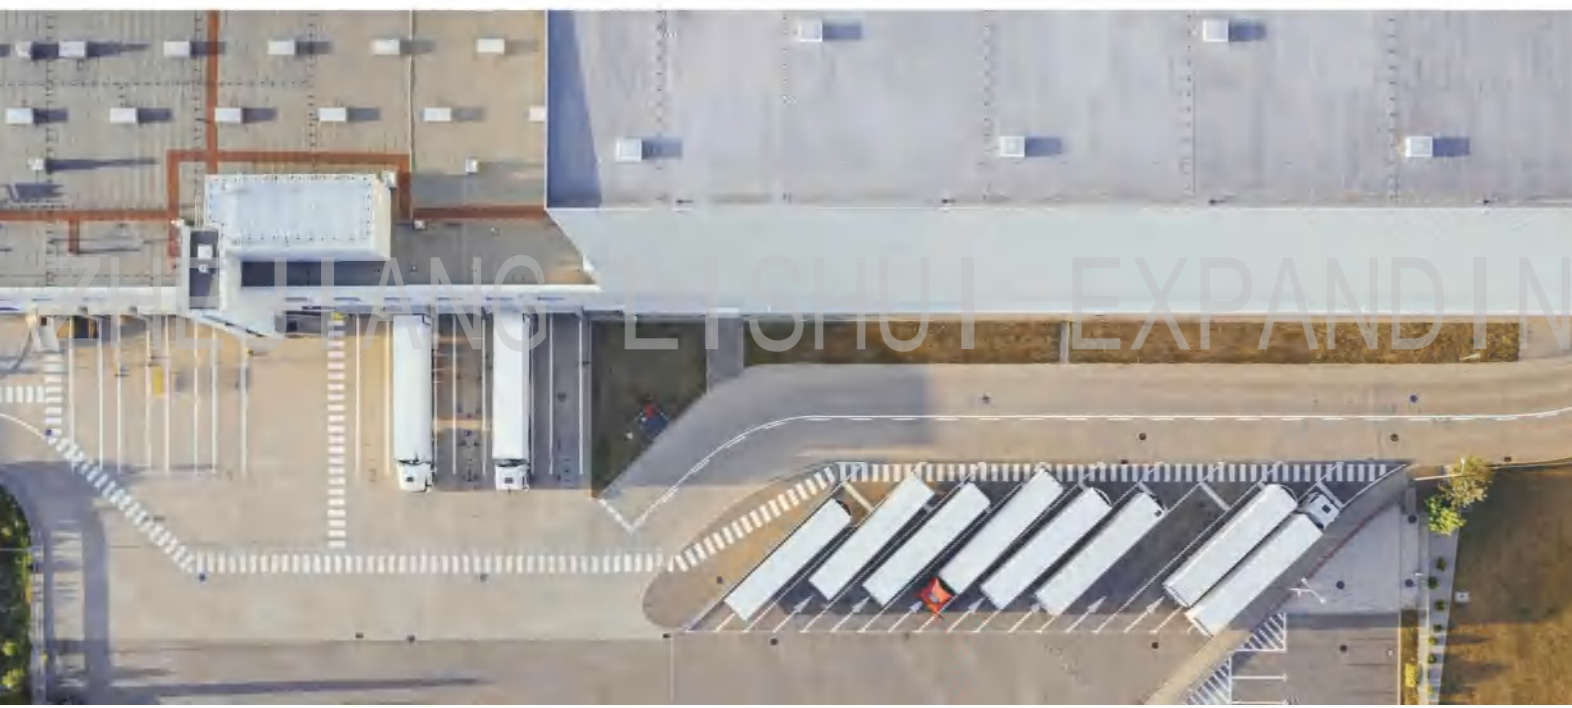

In 2008, Ruian Expanding Automobile Factory
2008年瑞安市拓展汽车厂

In 2018, Zhejiang Lishui Expanding Automobile Parts Co.,Ltd
2018年浙江丽水拓展汽车部件有限公司

2012年瑞安市拓展汽车部件有限公司
In 2012, Ruian Expanding Automobile Parts Co.,Ltd



CE




E-mark



ISO 9001




UKCA (UK)



EAC

Products Process

工艺流程

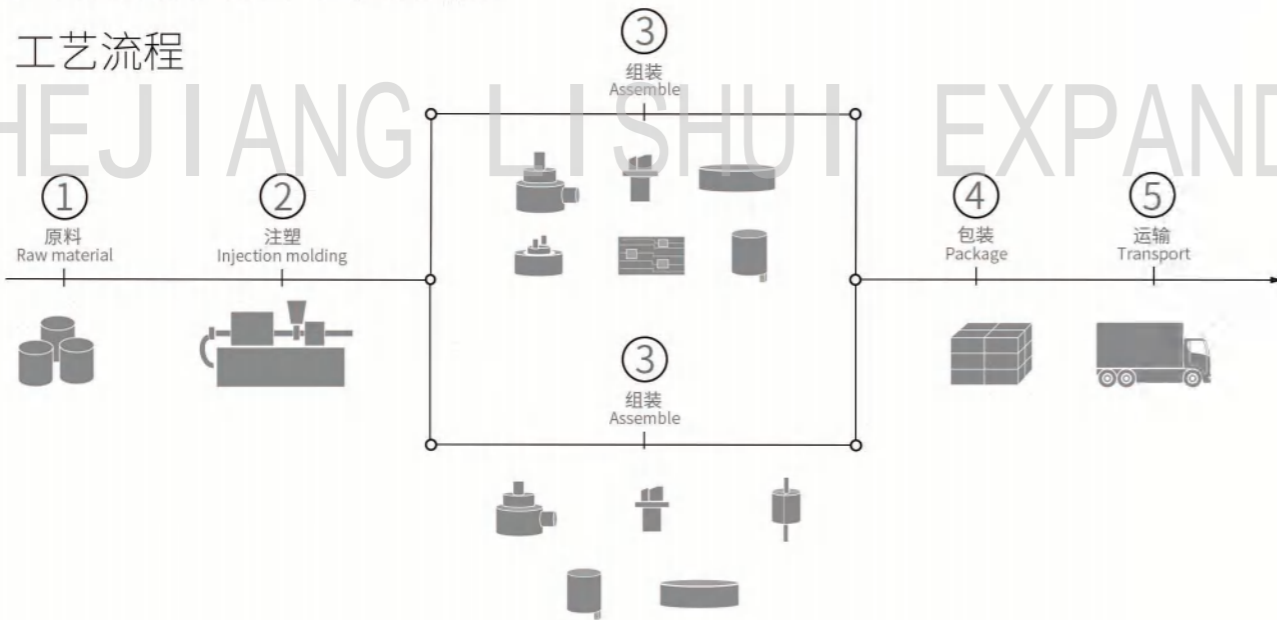

目录

Directory



Snail-shaped electric horn
蜗牛喇叭

Disc type electric horn
盆形电喇叭

Air horn & compressor
气喇叭&压缩机

Backup Alarm & Electronic siren
倒车喇叭&警报器

蜗牛喇叭

信号方式：脉冲气压

声音传输：扩散式的扇形发散传输到蜗牛喇叭出口处的两侧，呈扇形方式传输，生相和谐

使用优点：多用于警告靠近的驾车者，能让对方驾驶室者估计车辆的方向和距离。

生产材料：采用高质量材料，适应各种天气，有较强的抗撞击能力。

Snail horn (сигнал улитки)

Signal mode: pulse pressure

Sound transmission: diffused fan-shaped divergence is transmitted to both sides of the snail's horn exit, and is transmitted in a fan-shaped manner.

Advantages of use: It is mostly used to warn motorists who are close to each other, and allows the other driver to estimate the direction and distance of the vehicle.

Production materials: high-quality materials, adapt to various weathers, and have strong impact resistance.




TZ-101(TZ-A001-90-2)

Voltage:12/24V
Current:5A
Frequency:H450hz L410hz
Sound Level:110±5db
Diameter:Φ90MM




Inside

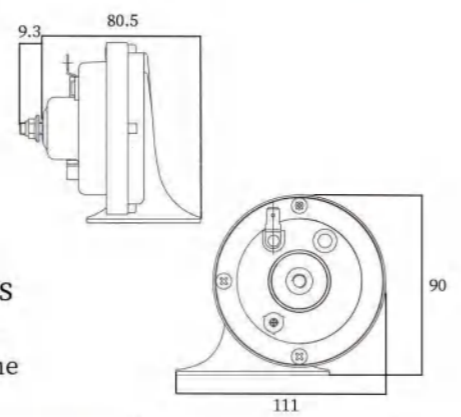

Manganese steel castanets
High content manganese steel vibrating plate
Not easy to deform, ensure sound quality

High quality tungsten contacts
inferior contacts will cause the horn to
have a short life and burn out at any time



TZ-101YC



TZ-101RC



TZ-101B



TZ-101C



TZ-101BK

TZ-102 (TZ-A001-90-1)

Voltage:12/24V
Current: 5A
Frequency: H510±20hz L410±20hz
Sound Level: 110±5db
Diameter: Φ90MM



TZ-102R



TZ-102B



TZ-103 (TZ-A004-90-3)

Voltage:12/24V
Current: 5A
Frequency: H510±20hz L410±20hz
Sound Level: 110±5db
Diameter: Φ90MM



TZ-103Cpg



TZ-104 (TZ-A004-90-4)

Voltage:12/24V
Current: 4.5A
Frequency: H510±20hz L410±20hz
Sound Level: 110±5db
Diameter: Φ90MM



TZ-104R



TZ-104B



TZ-105 (TZ-A001-90-3)

Voltage:12/24V
Current: 4.5A
Frequency: H510±20hz L410±20hz
Sound Level: 110±5db
Diameter: Φ90MM



TZ-105R



TZ-106 (TZ-A009-90-1)

Voltage:12/24V
Current: 4.5A
Frequency: H510±20hz L410±20hz
Sound Level: 110±5db
Diameter: Φ90MM
For Lada





TZ-107 (TZ-A002-100-1)

Voltage:12V
Current: 5A
Frequency: H510±20hz L410±20hz
Sound Level: 110±5db
Diameter: Φ103MM
For Volga



TZ-107D





TZ-108 (TZ-A002-100-2)

Voltage:24V
 Current: 5A
 Frequency: H510±20hz L410±20hz
 Sound Level: 110±5db
 Diameter: Φ103MM
 For Kamas



TZ-108D




TZ-112 (TZ-A013-80-1)

Voltage:12/24V
 Current: 4.5A
 Frequency: H510±20hz L410±20hz
 Sound Level: 110±5db
 Diameter: Φ80MM
 For Toyota



TZ-112-1



TZ-109 (TZ-A001-75-2)

Voltage:12/24V
 Current: 4.5A
 Frequency: H510±20hz L410±20hz
 Sound Level: 110±5db
 Diameter: Φ75MM



TZ-110 (TZ-A006-80-5)

Voltage:12/24V
 Current: 4.5A
 Frequency: H510±20hz L410±20hz
 Sound Level: 110±5db
 Diameter: Φ80MM



TZ-113 (TZ-A004-90-1)

Voltage:12/24V
 Current: 4.5A
 Frequency: H510±20hz L410±20hz
 Sound Level: 110±5db
 Diameter: Φ90MM



TZ-113G



TZ-113-1




TZ-111 (TZ-A008-80-1)

Voltage:12/24V
 Current: 4.5A
 Frequency: H510±20hz L410±20hz
 Sound Level: 110±5db
 Diameter: Φ80MM
 For Excelle



TZ-114 (TZ-A006-90-1)

Voltage:12/24V
 Current: 4.5A
 Frequency: H510±20hz L410±20hz
 Sound Level: 110±5db
 Diameter: Φ90MM

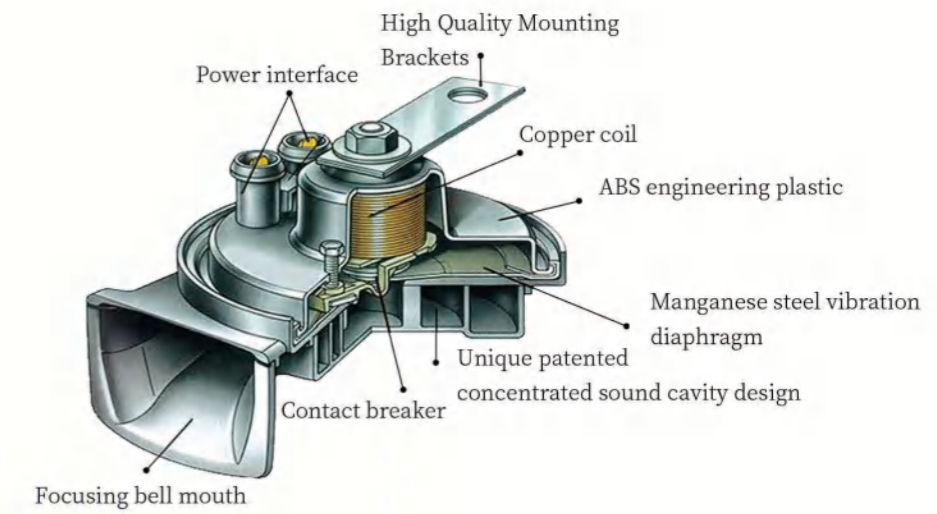

TZ-115

Voltage:12/24V
Current: 4.5A
Frequency: H510±20hz L410±20hz
Sound Level: 110±5db
Diameter: Φ80MM



TZ-119 (TZ-A002-80-1)

Voltage:12/24V
Current: 4.5A
Frequency: H510±20hz L410±20hz
Sound Level: 110±5db
Diameter: Φ80MM



TZ-119R

TZ-119W



TZ-116 (TZ-A008-90-2)

Voltage:12/24V
Current: 4.5A
Frequency: H510±20hz L410±20hz
Sound Level: 110±5db
Diameter: Φ90MM



TZ-120 (TZ-A001-95-4)

Voltage:12/24V
Current: 4.5A
Frequency: H510±20hz L410±20hz
Sound Level: 110±5db
Diameter: Φ95MM



TZ-120-1

TZ-120-2

TZ-120-3



TZ-117 (TZ-A012-80-2)

Voltage:12/24V
Current: 4.5A
Frequency: H510±20hz L410±20hz
Sound Level: 110±5db
Diameter: Φ80MM



TZ-121

Voltage:12/24V
Current: 4.5A
Frequency: H510±20hz L410±20hz
Sound Level: 110±5db
Diameter: Φ90MM



TZ-118

Voltage:12/24V
Current: 4.5A
Frequency: H510±20hz L410±20hz
Sound Level: 110±5db
Diameter: Φ75MM



TZ-113-1



TZ-122

Voltage:12/24V
Current: 4.5A
Frequency: H480±20hz L400±20hz
Sound Level: 110±5db
Diameter: Φ92MM




TZ-123 (TZ-D001-1)

Voltage:12/24V
 Current: 5A
 Frequency: H510±20hz L410±20hz
 Sound Level: 110±5db
 Diameter: Φ90MM
 Sound:6/12/18/24 Tone,Melodic



TZ-127 (TZ-D006-1)

Voltage:12/24V
 Current: 6A
 Frequency: H510±20hz L410±20hz
 Sound Level: 110±5db
 Diameter: Φ90MM
 Sound:6/12/18/24 Tone,Melodic

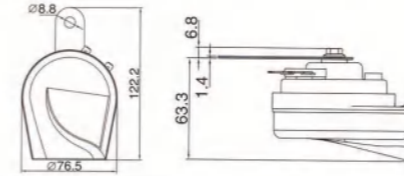

TZ-124 (TZ-A001-130-2)

Voltage:12/24V
 Current: 10A
 Frequency: H510±20hz L410±20hz
 Sound Level: 115±5db
 Diameter: Φ130MM



TZ-128 (TZ-D010-1)

Voltage:12/24V
 Current: 6A
 Frequency: H510±20hz L410±20hz
 Sound Level: 110±5db
 Diameter: Φ90MM
 Sound:1 or 6 Tone,Melodic



TZ-124-1 TZ-124Y

TZ-125 (TZ-A001-115-2)

Voltage:12/24V
 Current: 9A
 Frequency: H510±20hz L410±20hz
 Sound Level: 115±5db
 Diameter: Φ115MM



TZ-125BK TZ-125R

TZ-126

Voltage:12
 Current: 6A
 Frequency: H480±20hz L400±20hz
 Sound Level: 115±10db
 Diameter: Φ100MM



盆型喇叭

信号方式: 金属撞击

声音传输: 有方向性地沿直线传输, 喇叭结构阻止了声响向旁边发散, 而受控制的向前发出, 声音强。

使用优点: 声音响亮, 具有很好的穿透性, 多用于警告较远的驾车者。

生菜材料: 采用高质量材料, 适应各种天气, 有较强的抗撞击能力。

Disc type horn (Сигнал типа диска)

Single mode: Metal hit

Sound transmission:transmits along the straight line in the right way tropism,the structure of horn prevented the sound to diverge to side,but is controlled to send it out forward,volume is intensity of sound.

The merits of using:the sound is resounding,has the very good penetrability, mosfly used in warning the far driver.

Production material:It adoped the high grade material,

the material adapts each kind of weather,and has the strong anti-hit ability.



TZ-201

Voltage:12V

Current: 3.5A

Frequency: H400±20hz

Sound Level: 105±5db

Diameter: Φ65/Φ70MM



TZ-101C



TZ-202

Voltage:12V

Current: 3.5A

Frequency: H400±20hz

Sound Level: 105±5db

Diameter: Φ65/Φ70MM



TZ-202BC

TZ-202C

TZ-202R



TZ-203 (TZ-B001-75-2)

Voltage:12/24V

Current: 3.5A

Frequency: H420±20hz L350±20hz

Sound Level: 110±5db

Diameter: Φ75MM

For Honda



TZ-204U



TZ-204 (TZ-B001-70-1)

Voltage:12/24V

Current: 3.5A

Frequency: H420±20hz L350±20hz

Sound Level: 105 ±5db

Diameter: Φ75/Φ80MM

For Toyota



TZ-204U



TZ-205 (TZ-B001-85-2)

Voltage:12/24V

Current: 5A

Frequency: H420±20hz L350±20hz

Sound Level: 110±5db

Diameter: Φ85MM

For Toyota



TZ-205R

TZ-205C



TZ-206
 Voltage:12/24V
 Current: 5A
 Frequency: H420±20hz L350±20hz
 Sound Level: 110±5db
 Diameter: Φ80MM



TZ-211 (TZ-B002-100-3)
 Voltage:12/24V
 Current: 5A
 Frequency: H420±20hz L350±20hz
 Sound Level: 110±5db
 Diameter: Φ100MM



TZ-211W



TZ-207 (TZ-B001-90-3)
 Voltage:12/24V
 Current: 5A
 Frequency: H420±20hz L350±20hz
 Sound Level: 110±5db
 Diameter: Φ90MM



TZ-212 (TZ-B005-125-1)
 Voltage:12/24V
 Current: 5A
 Frequency: H420±20hz L350±20hz
 Sound Level: 115± 5db
 Diameter: Φ125MM



TZ-212M



TZ-212B



TZ-212BK



TZ-212Y



TZ-208 (TZ-B003-90-1)
 Voltage:12/24V
 Current: 5A
 Frequency: H420±20hz L350±20hz
 Sound Level: 110±5db
 Diameter: Φ90MM



TZ-208BK



TZ-222 (TZ-B005-110-1)
 Voltage:12/24V
 Current: 5A
 Frequency: H420±20hz L350±20hz
 Sound Level: 110± 5db
 Diameter: Φ125MM



TZ-222W



TZ-222BK



TZ-209 (TZ-B004-90-2)
 Voltage:12/24V
 Current: 5A
 Frequency: H420±20hz L350±20hz
 Sound Level: 110±5db
 Diameter: Φ90MM



TZ-223 (TZ-B004-125-1)
 Voltage:12/24V
 Current: 5A
 Frequency: H420±20hz L350±20hz
 Sound Level: 110±5db
 Diameter: Φ125MM




TZ-210
 Voltage:12/24V
 Current: 5A
 Frequency: H420±20hz L350±20hz
 Sound Level: 110±5db
 Diameter: Φ110MM



TZ-224 (TZ-B003-130-1)
 Voltage:12/24V
 Current: 6A
 Frequency: H420±20hz L350±20hz
 Sound Level: 115±5db
 Diameter: Φ130MM



TZ-224S



TZ-224C



TZ-225 (TZ-B007-125-1)

Voltage:12/24V
Current: 5A
Frequency: H420±20hz L350±20hz
Sound Level: 110±5db
Diameter: Φ125MM



TZ-230

Voltage:12/24V
Current: 5A
Frequency: H420±20hz L350±20hz
Sound Level: 110±5db
Diameter: Φ100MM
For Toyota



TZ-226 (B001-155-2)

Voltage:12/24V
Current: 6A
Frequency: H400±20hz L330±20hz
Sound Level: 115±5db
Diameter: Φ155MM



TZ-231(TZ-B005-110-1)

Voltage:12/24V
Current: 5A
Frequency: H420±20hz L350±20hz
Sound Level: 110±5db
Diameter: Φ110MM



TZ-226BK

TZ-227 (TZ-B008-110-1)

Voltage:12/24V
Current: 5A
Frequency: H510±20hz L410±20hz
Sound Level: 115±10db
Diameter: Φ115MM



TZ-228 (TZ-B002-90-3)

Voltage:12/24V
Current: 5A
Frequency: H420±20hz L350±20hz
Sound Level: 110±5db
Diameter: Φ90MM



TZ-229 (TZ-B007-90-1)

Voltage:12/24V
Current: 5A
Frequency: H420±20hz L350±20hz
Sound Level: 110±5db
Diameter: Φ90MM



TZ-229D



气喇叭

信号方式: 脉冲方式

声音传输: 由前座、后座、响片、喇叭管和电磁阀组成, 当气量增加时, 响片振幅增大, 声音的响度增强, 能够传播的更远。

使用优点: 适用于有气源装置的各种车辆, 音质宏亮。

生产材料: 采用高质量材料, 适应各种天气, 有较强的抗撞击能力。

Air horn (воздушный сигнал)

Signal mode: pulse air pressure

Sound transmission: It composed by the front seat, The back seat, The sound piece, The horn and the solenoid valve. When air tolerance increasing, the swing of the soundrattles can spread further.

The merits of using: It is suitable for each kind of vehicles with air source devices, The acoustic fidelity is sonorous.

Production material: It adopted the high grade materials, adapts each kind of weather, and has the strong anti-hit ability.

TZ-301 (TZ-C001-1)


Voltage: 12/24V

Current: 10A

Frequency: 540/680hz

Sound Level: ≥ 120 db

Diameter: 230/295MM



TZ-301R



TZ-301BK



TZ-302 (TZ-F017-1)

Voltage: 12/24V

Current: ≤ 20 A

Frequency: 540/680hz

Sound Level: ≥ 120 db

Diameter: 230/295MM



TZ-302R



TZ-302BK

TZ-303 (TZ-C003-1)

Voltage: 12/24V

Current: 10A

Frequency: 450hz

Sound Level: ≥ 120 db

Diameter: 320/370MM



TZ-303R



TZ-303BK



TZ-304

Voltage: 12/24V

Current: 15A

Frequency: 450hz

Sound Level: ≥ 115 db


Diameter: 335/390MM



TZ-304R



TZ-304BK

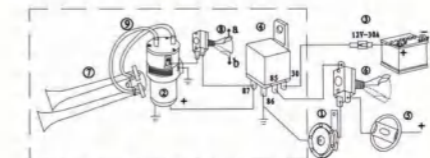

TZ-305
Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db
Diameter: 540/640MM



TZ-305R TZ-305BK

TZ-306
Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db



TZ-306R TZ-306BK

TZ-307
Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db
Diameter: 320/370MM



TZ-307R TZ-307BK

TZ-308
Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db
Diameter: 340/400MM



TZ-308R TZ-308BK

TZ-309
Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db
Diameter: 250/320MM



TZ-309R TZ-309BK

TZ-310
Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db
Diameter: 335/400MM



TZ-310C TZ-310R TZ-310BK

TZ-311 (TZ-C002-1)
Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db
Diameter: 165/230/300MM



TZ-311BK

TZ-312 (TZ-C005-1)
Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db
Diameter: 165/230/300/350MM



TZ-312BK TZ-312C

TZ-313
Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db
Diameter: 290/290/340/400MM



TZ-313C TZ-313R TZ-313BK

TZ-314 (TZ-C004-1)
Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥115db
Diameter: 305/345/390MM



TZ-314-1

TZ-315

Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db
Diameter: 305/345/390MM



TZ-315C TZ-315R

TZ-319 (TZ-C007-1)

Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db
Diameter: 640/740MM



TZ-319R TZ-319BK

TZ-316

Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db
Diameter: 165/230/330/350MM



TZ-316C TZ-316R

TZ-320 (TZ-C008-1)

Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db
Diameter: 640/740MM



TZ-320R TZ-320BK

TZ-317

Voltage:12/24V
Current: 10A
Frequency: 680hz
Sound Level: ≥120db



TZ-317R TZ-317BK

TZ-321

Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db
Diameter: 640/740MM
For Hino



TZ-321R TZ-321BK

TZ-318 (TZ-F015-1)

Voltage:12/24V
Current: 15A
Frequency: 450hz
Sound Level: ≥120db
Diameter: 450MM



TZ-318C




TZ-318BK



TZ-318B



TZ-318-1

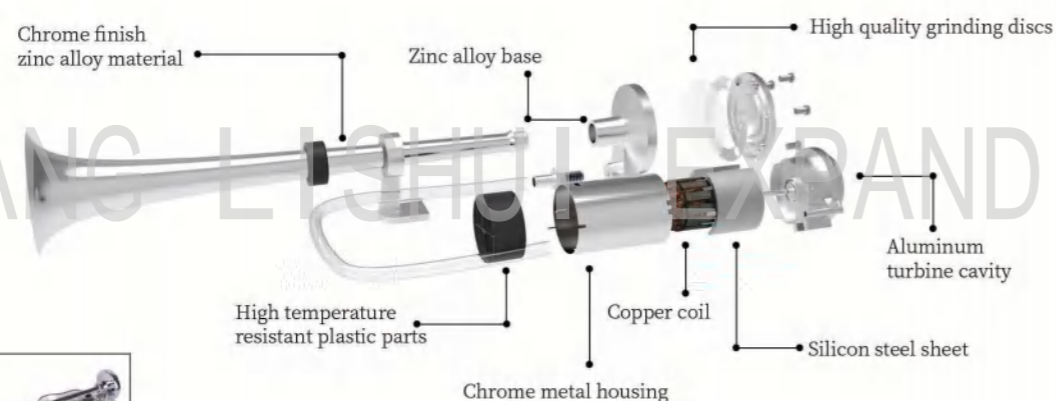

TZ-322

Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db
Diameter: 640/740MM



TZ-323 (TZ-C009-1)

Voltage:12/24V
Current: 10A
Frequency: 450hz
Sound Level: ≥120db
Sound Level: 1000/1200MM



TZ-323R TZ-323BK

TZ-324
Voltage:12/24V
Current: 10A
Frequency: 490hz
Sound Level: ≥120db



TZ-329 (TZ-F013-1)
Voltage:12/24V
Current: 15A
Frequency: 530/680/760/830hz
Sound Level: ≥120db
Diameter: 165/190/215/250/275MM



TZ-329C TZ-329R TZ-329BK TZ-329Y TZ-329B



TZ-325 (TZ-F004-1)
Voltage:12/24V
Current: 15A
Frequency: 450hz
Sound Level: ≥115db
Diameter: 225MM



TZ-325C TZ-325R TZ-325BK TZ-325Y

TZ-329 (TZ-F014-1)
Voltage:12/24V
Current: 15A
Frequency: 530/680/760/830hz
Sound Level: ≥120db
Diameter: 165/190/215/250/275/290MM



TZ-329C TZ-329R TZ-329BK TZ-329Y TZ-329B



TZ-326
Voltage:12/24V
Current: 8A
Frequency: 530/680hz
Sound Level: ≥150db
Diameter: 220/240MM



TZ-326C TZ-326R TZ-326BK TZ-326Y TZ-326B

TZ-331
Voltage:12/24V
Current: 10A
Frequency: 400hz
Sound Level: ≥150db



TZ-331-1



TZ-327 (TZ-F001-1)
Voltage:12/24V
Current: 15A
Frequency: 530/680/830hz
Sound Level: ≥120db
Diameter: 165/215MM



TZ-327C TZ-327R TZ-327BK TZ-327Y TZ-327B

TZ-332 (TZ-A001-0-1) Volt-
age:12/24V
Current: 10A
Frequency: 500hz
Sound Level: ≥120db



TZ-332BK TZ-332R



TZ-328 (TZ-F011-2)
Voltage:12/24V
Current: 15A
Frequency: 530/680/760/830hz
Sound Level: ≥120db
Diameter: 154/165/215MM




TZ-328C TZ-328R TZ-328BK TZ-328Y TZ-328B

TZ-333
Voltage:12/24V
Current: 10A
Frequency: 500hz
Sound Level: ≥120db



TZ-334 (TZ-F006-1)

Voltage:12/24V
Current: 15A
Frequency: 530/680hz
Sound Level: ≥115db

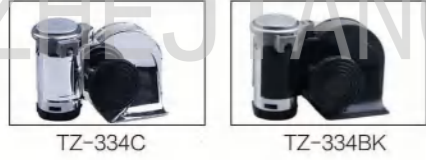

TZ-338

Voltage:12/24V
Current: 15A
Frequency: 580/680hz
Sound Level: ≥120db
Diameter:165/220MM



TZ-334-1

Voltage:12/24V
Current: 15A
Frequency: 530/680hz
Sound Level: ≥115db



TZ-339

Voltage:12/24V
Current: 10A
Frequency: 580/680hz
Sound Level: ≥120db
Diameter:510/560MM



TZ-335

Voltage:12/24V
Current: 10A
Frequency: 530/680hz
Sound Level: ≥115db
Diameter:400MM



TZ-340

Voltage:12/24V
Current: 10A
Frequency: 580/680hz
Sound Level: ≥120db
Diameter:540/630MM



TZ-336

Voltage:12/24V
Current: 10A
Frequency: 530/680hz
Sound Level: ≥120db
Diameter:510/560MM



TZ-341

Sound Level: ≥110db



TZ-337

Voltage:12/24V
Current: 15A
Frequency: 680hz
Sound Level: ≥115db



TZ-501

Voltage:12V
Current: 10A
Pressure:150PSI
Flow rate:35/min



TZ-502
Voltage:12V
Current: 10A
Pressure:150PSI
Flow rate:35/min



TZ-503
Voltage:12V
Current: 10A
Pressure:180PSI
Flow rate:160/min



TZ-336-3



TZ-336-4



TZ-336-5



TZ-336-6



TZ-336-7



TZ-336-8



TZ-336-9



TZ-601-1



TZ-602-2



TZ-603-3B



TZ-603-3S



TZ-601-4



TZ-601-5



TZ-602-1



TZ-602-2



TZ-336-1



TZ-336-1B



TZ-336-1C



TZ-336-1BK



TZ-336-2C



TZ-336-2R



TZ-336-2B

BACKUP ALARM & ELECTRONIC SIREN

ЭЛЕКТРОННАЯ СИРЕНА




TZ-401
 Voltage:12-80V
 Current: 250mA
 Power: 10W
 Sound Level: 105±10db
 Waterproof grade: IP67
 Sound:Beep-beep sound



TZ-401W




TZ-402
 Voltage:12-80V
 Current: 250mA
 Power: 10W
 Sound Level: 105±10db
 Waterproof grade: IP67
 Sound:Beep-beep sound

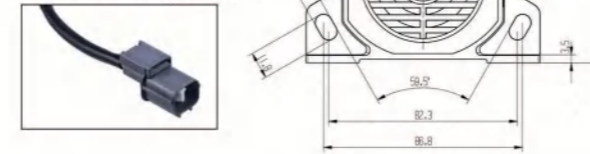

TZ-403
 Voltage:12-80V
 Current: 250mA
 Power: 10W
 Sound Level: 105±10db
 Waterproof grade: IP67
 Sound:Beep-beep sound



TZ-404
 Voltage:12-80V
 Current: 250mA
 Power: 10W
 Sound Level: 105±10db
 Waterproof grade: IP67
 Sound:Beep-beep sound

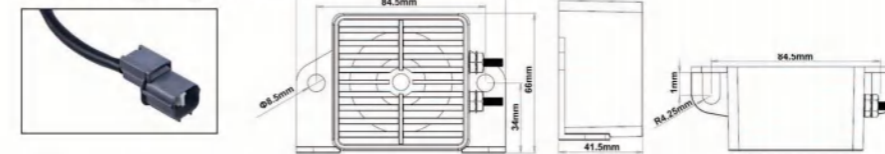

TZ-405
 Voltage:12-80V
 Current: 250mA
 Power: 15W
 Sound Level: 105±10db
 Waterproof grade: IP67
 Sound:Beep-beep sound



TZ-406
Voltage:12-80V
Current: 500mA
Power: 20W
Sound Level: 110±10db
Waterproof grade: IP67
Sound:Beep-beep sound



TZ-406-1

TZ-411
Voltage:12-24V
Current: 120mA
Power: 10W
Sound Level: 105±10db
Sound:1 or 6 Tone,Melodic



TZ-407 (TZ-E006-1)
Voltage:12-24V
Current: 120mA
Power: 10W
Sound Level: 105±10db
Waterproof grade: IP65
Sound:Beep-beep sound



TZ-322
Voltage:12/24V
Current: ≤4A
Frequency: 450hz
Sound Level: ≥110db
Diameter: 1000MM



TZ-408
Voltage:12-24V
Current: 120mA
Power: 5W
Sound Level: 105±10db
Sound:Beep-beep sound/Music



TZ-413(TZ-E001-1)
Voltage:DC6-15V
Imped:4/6/8 ohm
Current: 600/1200mA
Power: 15/20W
Sound Level: 110±10db
Sound:1 or 6 Tone,Melodic



TZ-409
Voltage:12-24V
Current: 120mA
Power: 5W
Sound Level: 105±10db
Sound:Beep-beep sound/Music



TZ-414(TZ-E014-1)
Voltage:DC6-15V
Imped:4/6/8 ohm
Current: 600/1200mA
Power: 15/20W
Sound Level: 110±10db
Sound:1 or 6 Tone,Melodic



TZ-410
Voltage:12-24V
Current: 120mA
Power: 10W
Sound Level: 105±10db
Waterproof grade: IP65
Sound:Please pay attention to reversing



TZ-410BK

TZ-415 (TZ-E002-1)
Voltage:DC6-15V
Imped:4/6/8 ohm
Current: 600/800/1200mA
Power: 15/20/25W
Sound Level: 110±10db



TZ-415-1



TZ-415-2



TZ-415-3



TZ-416
 Voltage:DC6-15V
 Imped:6/10 ohm
 Current: 600/1200mA
 Power: 15/20W
 Sound Level: 115±10db
 Sound:1 or 6 Tone,Melodic



TZ-421(TZ-E006-9-1)
 Voltage:12/24V
 Current: 200mA
 Power: 15W
 Sound Level: 105±10db
 Sound: 3 Tone,Melodic



TZ-421-1



TZ-417
 Voltage:DC6-15V
 Imped:6/10 ohm
 Current: 600/1200mA
 Power: 15/20W
 Sound Level: 115±10db
 Sound:1 or 6 Tone,Melodic



TZ-422
 Voltage:12/24V
 Current: 150mA
 Power: 25W
 Sound Level: 110±10db
 Sound:1 or 6 Tone,Melodic



TZ-418
 Voltage:DC6-15V
 Imped:6/8/10 ohm
 Current: 600/800mA
 Power: 15/20W
 Sound Level: 110±10db
 Sound:1 or 6 Tone,Melodic



TZ-423 (TZ-E008-1)
 Voltage:12/24V
 Current: 150mA
 Power: 20W
 Sound Level: 110±10db
 Sound:3 or 7 Tone,Melodic



TZ-423-1



TZ-423-2



TZ-419(TZ-E006-10)
 Voltage:DC6-15/24V
 Frequency:2.6k
 Current: 150mA
 Power: 10/15W
 Sound Level: 105±10db
 Sound:1 or 6 Tone,Melodic



TZ-419-1



TZ-419-2



TZ-424 (TZ-E011-1)
 Voltage:12/24V
 Current: 150mA
 Power: 20W
 Sound Level: 110±10db
 Sound:3 or 7 Tone,Melodic



TZ-424-1



TZ-424-2



TZ-420
 Voltage:DC6-15/24V
 Frequency:3k
 Current: 120mA
 Power: 10/15W
 Sound Level: 105±10db
 Sound:1 or 6 Tone,Melodic



TZ-420W



TZ-425 (TZ-E021-1)

Voltage:12/24V
Current: 150mA
Power: 100-150W
Sound Level: 110±10db
Sound:1 or 18 Tone,Melodic



TZ-424-1

TZ-424-2

TZ-424-3



TZ-430(TZ-E015-1)

Voltage:12/24V
Current: 100mA
Power: 15W
Sound Level: 110±10db



TZ-426 (TZ-F003-1)

Voltage:12/24V
Current: 100mA
Power: 12W
Sound Level: 110±10db



TZ-431

Voltage:12V
Current: 150mA
Power: 20W
Sound Level: 110±10db
Sound:7 tone



recording function



TZ-427

Voltage:12/24V
Current: 100mA
Power: 20W
Sound Level: 110±10db



TZ-432

Voltage:12V
Current: 150mA
Power: 10W
Sound Level: 110±10db



TZ-428

Voltage:12/24V
Current: 150mA
Power: 100-250W
Sound Level: 110±10db
Sound:1 or 18 Tone,Melodic



TZ-429(TZ-E006-12MINI)

Voltage:12/24V
Current: 100mA
Power: 5W
Sound Level: 110±10db



TZ-429-1

